


ROTOR	C.F.R	CAPACITIES IN CUBIC FEET PER MINUTE						
		5 RPM	10 RPM	15 RPM	20 RPM	25 RPM	30 RPM	35 RPM
6 VANE	0.672	3.360	6.720	10.080	13.440	16.800	20.160	23.520
8 VANE	0.649	3.245	6.490	9.735	12.980	16.225	19.470	22.715

(A)

MOTOR HP/RPM			
MOTOR HP	FEEDER RPM	A	B
1/2 HP	7 TO 10	38-7/16"	7.19"
3/4 HP	12, 13	38-7/16"	7.19"
1 HP	15, 17, 19	38-7/16"	7.19"
1-1/2 HP	22	38-7/16"	7.19"
1-1/2 HP	26, 29	35-3/16"	7.19"

NOTES :

- 1) ALL MOTORS: 3-60-230/460, TEFC, INTEGRAL WITH REDUCER.
- 2) INFORMATION IS BASED UPON CATALOG DATA, THIS INFORMATION MUST BE USED IN CONJUNCTION WITH, AND NOT IN SUBSTITUTION FOR, THE APPLICABLE PRODUCT CATALOG WHICH CONTAINS IMPORTANT PRECAUTIONS AND OTHER PERTINENT INFORMATION.
- 3) DIMENSIONS A & B WILL VARY WITH SPECIAL OPTION MOTORS SUCH AS EXPLOSION PROOF, VARIABLE SPEED, AND NEMA "C" FACE.

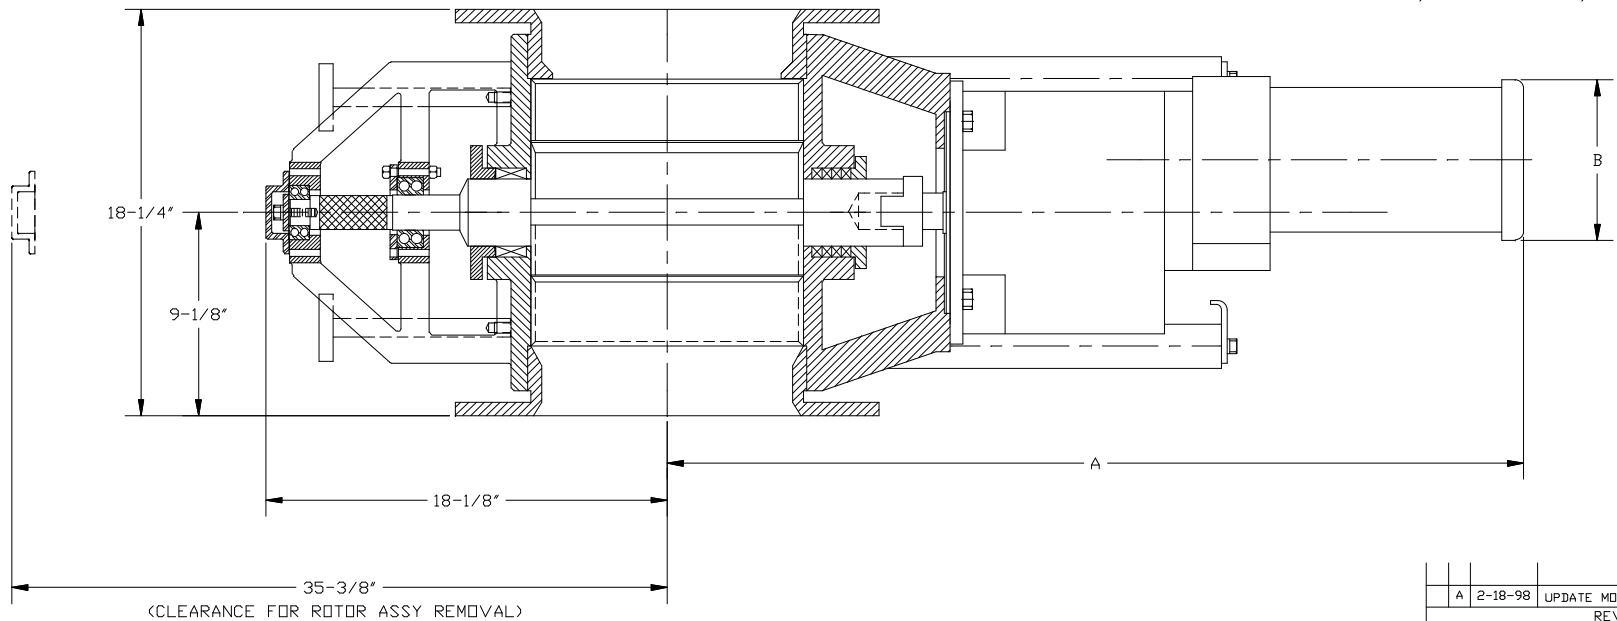

WM. W. MEYER & SONS, INC.
SKOKIE, ILLINOIS

A	2-18-98	UPDATE MOTOR CHART AND SIDE VIEW REVISIONS	GJL
12X12 KLEAN IN PLACE ROUND FLANGE FEEDER WITH TYPICAL RECOMMENDED GEARMOTOR			
OUR S.O. NO.		REF. S.O. NO.	
DRAWN J.M.	DATE 7-23-96	DRAWING NUMBER	
APPROVED MRD	SCALE	430E-1386	

M:\RAL\12X12KIP\FEEDR.DWG